

# CJC® Filter Separator

Solutions for separation of water, removal of particles, adsorption of oxidation by-products and varnish from oils



80% of all oil related failures  
and breakdowns arise due  
to contaminated oil






# Your challenge


80% of all oil related failures and breakdowns arise due to contaminated oil  
- avoid expenses on repairs and oil changes

## In-line filters alone do not keep the oil system clean & dry!

Contamination of an oil system leads to various problems which can result in machine downtime, frequent repairs of equipment and reduced oil lifetime. All of which means inefficient production and unnecessary expenses spent on repair and oil change.



Water Contaminated Oil




Abrasion



Corrosion/Rust




Resin/Varnish

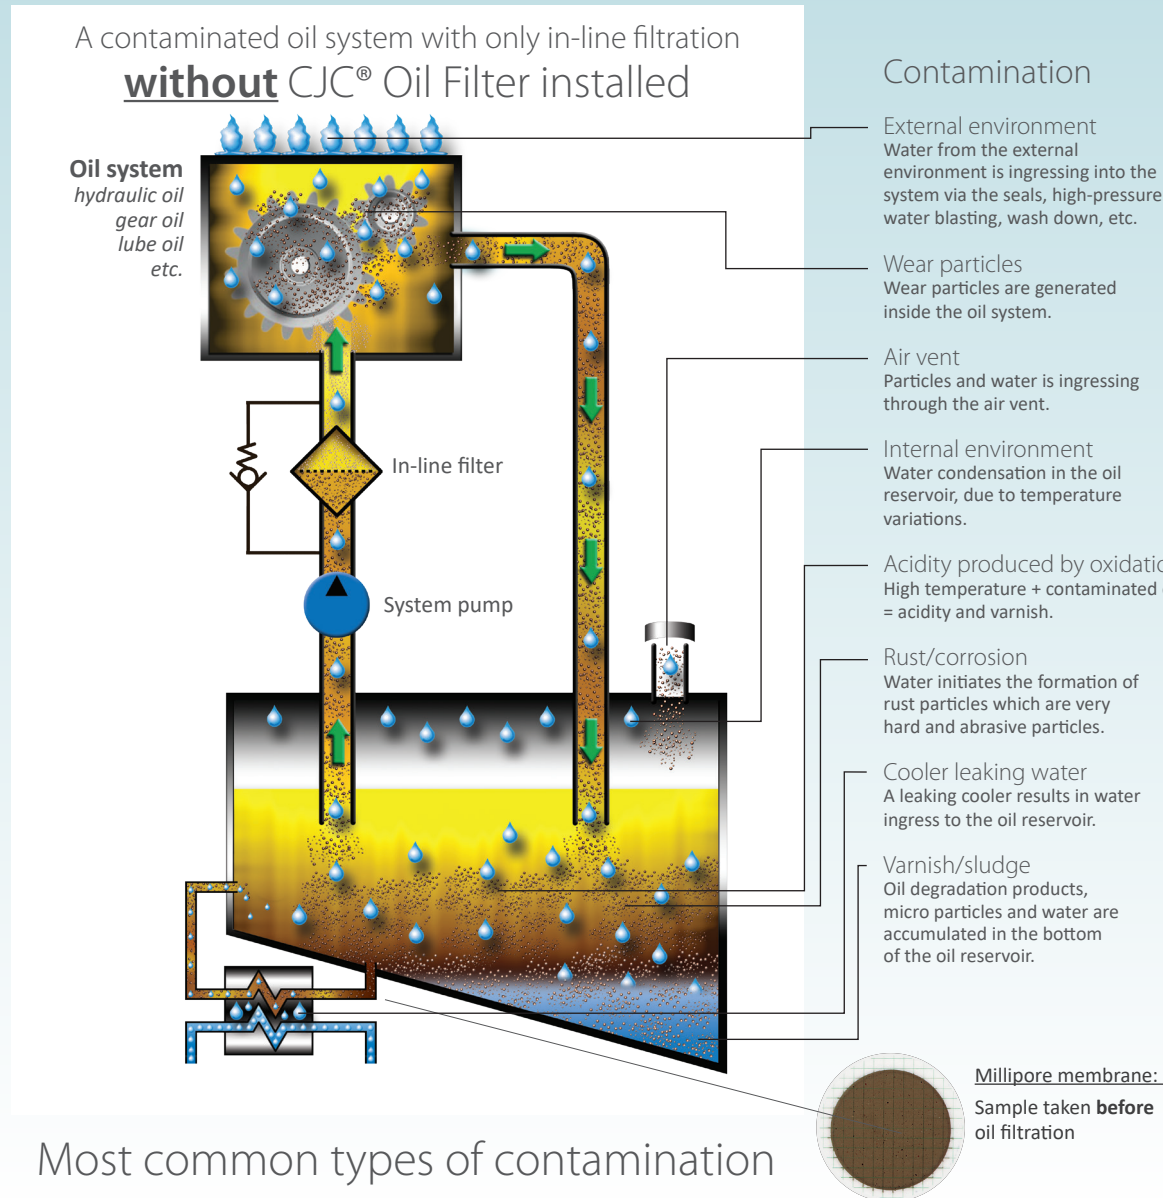


## Most common types of contamination


**Particles** (abrasive wear / grinding)  
When clearance sized hard particles are wedged between movable metal parts, they destroy the metal surface further and can result in additional wear.




**Oil degradation**  
Wear metal, water and high temperatures lead to oil degradation, which is the precursor of varnish. This results in sticky varnish that deposits on metal surfaces.



**Water** (cavitation & pitting)  
Occurs in areas where water is present and oil is compressed; the water implodes, causing the metal surfaces to crack and release more particles.



**Acidity**  
Acidity can be found in oil as by-products of oil degradation, combustion of gas or fuel, hydrolysis of Ester-based fluids etc. The amount of acidity in oil should be limited, since acidity will cause chemical corrosion of machine components and shorten the lifetime of the oil, just to mention a few of the unwanted effects.



# Your natural solution

Clean & dry oil and guaranteed success through oil filtration  
- we offer highly qualified technical back-up

## 1 Oil Filter - 4 solutions

Installing a CJC® Offline Oil Filter solution, you ensure clean & dry oil in your systems, removing both particles, water, acidity and oil degradation products - in one and the same process.



PTU 15/25



PTU2 27/27



PTU1 27/54




Thruster



PTU3 4x27/108




Marine Diesel Purifier

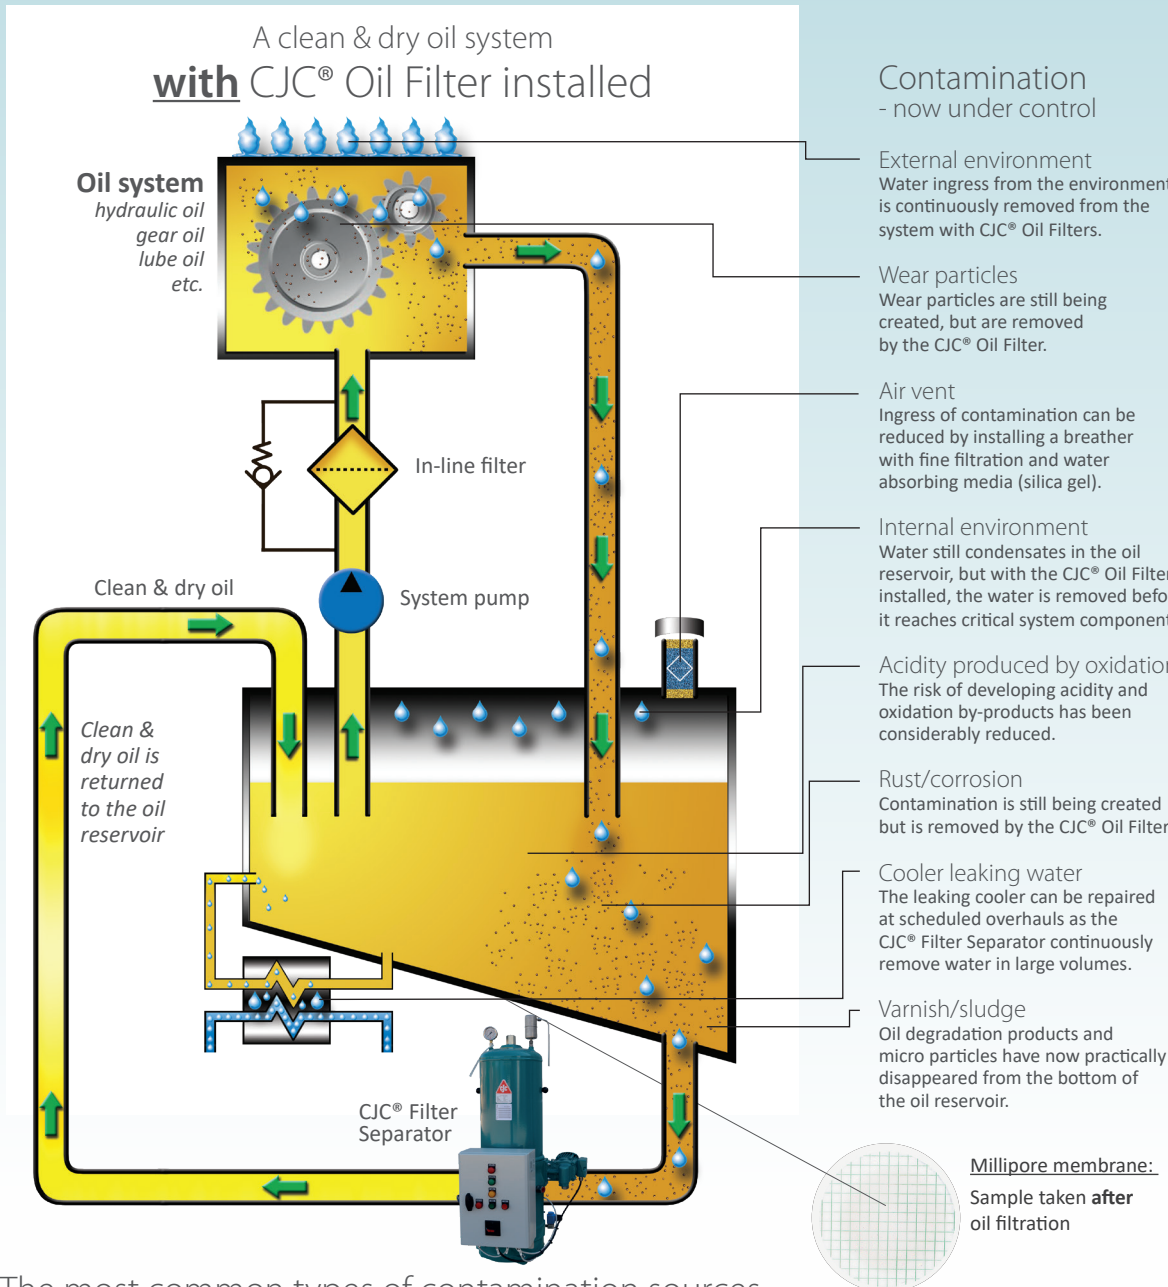


## The most common types of contamination sources



Removal of particles  
Particles down to 0.8 µm are retained in the filter mass



Separation of water  
The filter insert and coalescer element separates the water



Removal of acidity  
Special inserts neutralise acidic components in the fluid



Adsorption of oxidation  
Sludge/varnish in the oil is attracted to the polar sites of the filter mass and is retained there

# Our product

CJC® Filter Separators - simple, efficient and low maintenance  
- will guarantee your success!

## Key features of the CJC® Filter Separators

The CJC® Filter Separators are offline depth filters for diesel, hydraulic and lubricating oils for all sizes of oil systems from 2 litres to above 200,000 litres. Our oil filters are installed offline, meaning they are non-system critical (e.g. machinery shutdown is not necessary when changing filter insert.)

## Main components PTU2 27/27 Series

Pressure gauge  
The CJC® Filter Insert must be replaced at least once a year or according to the pressure gauge indicator

Filter housing  
Easy to remove when changing the insert

CJC® Filter Insert  
3 µm absolute filtration ratio


Oil inlet  
Contaminated oil is entering the filter

Coalescer element  
Cleanable stainless steel


Gear pump  
Reliable gear wheel pump

Filter base  
Constructed with fixture holes

Water drain valve

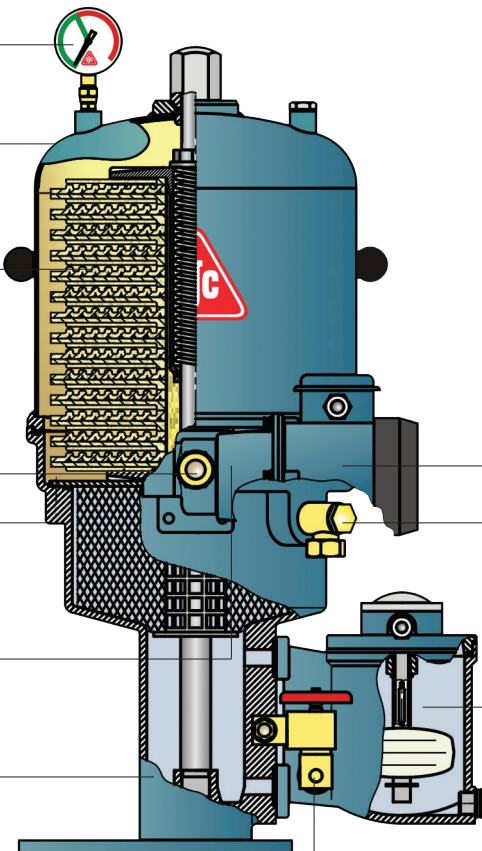

Coalescing of water in the CJC® Filter Insert  
The coalescing process starts in the filter insert. On their way through the cellulose fibres, microscopic water particles aggregate into water droplets, sinking down into the coalescing element



Separation of water in the CJC® Coalescing Element  
The droplets aggregate (coalesce) in the coalescing element and settle in the bottom of the housing and filter base

Electrical motor  
Low energy consumption

Oil outlet  
Clean & dry oil is returning to the reservoir and oil system

Automatic water discharge unit  
Simple, mechanical level control and discharge unit

## The CJC® Filter Insert system

All CJC® Filter Inserts have a 3 µm absolute filtration ratio and will remove particles, water, oil degradation products and acidity. The CJC® Filter Inserts are produced of 100% natural cellulose fibres from sustainable resources - no metal, no plastic, no chemicals.

- **Particles** down to 0.8 µm are retained in the unique CJC® depth filter media (cellulose).
- **Water** is removed either by absorption or separation according to oil system requirements.
- **Oil degradation products** are removed by the attraction to the polar fibers.
- **Acidity** can be neutralized with ion exchange resin media.



## Modular build-up

The modular build-up of the CJC® Filter Inserts means that a CJC® Fine Filter can be designed to fit any applications and requirements.





# Your benefits

Reduce your maintenance cost, fewer breakdowns, fewer oil changes  
- install a CJC® Filter Separator!

The cleanliness level achieved and maintained by oil filtration means that the predicted lifetime of machine components and oil is expected to be extended 2-10 times!  
The benefits that you can achieve when implementing CJC® Filter Separators will have a positive effect on many parameters such as:

## Financial benefits / Increased productivity

- Increased uptime
- Reduced maintenance budget
- Fewer unplanned breakdowns and stops of production
- Enhanced operational precision
- Leaking coolers can be repaired at schedule overhauls

## Less maintenance

- Less wear and increased lifetime of components, oil and filter inserts
- Longer time between service intervals
- Enhanced operational precision



## Lower energy consumption

- Lubricating capabilities remain intact
- Reduced friction
- Reduced pressure drop over in-line pressure filters
- Viscosity index is kept stable and efficiency is maintained

## Environmental benefits

- Fewer oil changes
- Reduced top-up of oil
- Less waste oil
- Reduced carbon footprint

**-all advantages to the total economy!**

## Satisfied customers

### MARINE:

Mr. Bjørn Helge Amundsen  
Tech. Superintendent  
Gulf Offshore Norway, North Truck, Norway  
Application: Supply vessel / work boat  
Solution: CJC® Filter Separator PTU2 27/27



*"After having tested nearly every piece of water removing equipment on the market in order to solve our water and contamination problem, we went for the CJC® Filter system, because it was simply the best. The filters did the job to our greatest satisfaction, removing particles, water and other waste products."*

*CJC® Filter systems for oil maintenance are a very good investment. The return of investment is very short."*

### MINING:

Mr. Dave J. Gamble  
Senior tribologist  
Anglo American, South Africa  
Application: Crusher  
Solution: CJC® Filter Separator 27/108



*"The CJC® Filter will release benefits as reduced downtime for maintenance, greatly reduced wear and consequent failures, increased availability, utilisation and production. All together, this results in extended oil life time."*

*This filter can easily clean the oil according to my recommendations, which is 16/14 on this type of application."*

### INDUSTRY:

Mr. Sylvester Kapias  
Manager Heat Treatment  
Nedschroef Altena GmbH  
Application: Quench washing bath  
Solution: CJC® Filter Separator PTU1 27/108



*"We already filter our quenching bath with a CJC® Fine Filter. Therefore, we decided to run this test with the skimmed oil. By using the CJC® Filter Separator we can annually save up to approximately EUR 70,000."*

### POWER:

Mr. Javier Gonzales  
Mech. Maintenance Department  
C.N. Vandellós II Tarragona, Spain  
Application: Main Turbine, Nuclear Power Plant  
Solution: CJC® Filter Separator PTU3 5x27/108



*"We bought this filter as a substitute for a centrifuge to remove the large amount of water that is generated in the turbine at start-up. But, unexpectedly, we have gained more benefits. Before installing the filter it was necessary to clean the varnish deposits off the walls in the heat exchanger at each stop of the plant. Now we just look at the system to verify that it is clean. We have never seen the oil so clean. The reliability of the equipment is increasing with time."*

**C.C.JENSEN will back you up  
- we have 60 years of experience!**

# C.C.JENSEN - contact us today!



Manufacturing & headquarters

## C.C.JENSEN A/S

Løvholmen 13 | DK - 5700 Svendborg | Denmark  
Tel. +45 6321 2014 | Fax: +45 6222 4615  
sales@ccjensen.dk | www.cjc.dk

## C.C.JENSEN worldwide

### Benelux

C.C.JENSEN Benelux B.V.  
Tel.: +31 182 37 90 29  
info.nl@ccjensen.nl  
www.ccjensen.nl

### France

C.C.JENSEN France  
Tel.: +33 366 753 170  
contact.fr@ccjensen.fr  
www.ccjensen.fr

### Italy

KARBERG & HENNEMANN srl  
Tel.: +39 059 29 29 498  
info@ccjensen.it  
www.cjc.it

### United Arab Emirates

C.C.JENSEN Middle East  
Tel.: +971 4 447 2886  
ccjensen.uae@ccjensen.com  
www.cjc.ae

### Chile

C.C.JENSEN S.L. Limitada  
Tel.: +56 2 739 2910  
ccjensen.cl@ccjensen.cl  
www.ccjensen.cl

### Germany

KARBERG & HENNEMANN  
GmbH & Co. KG  
Tel.: +49 (0)40 855 04 79 0  
kontakt@ccjensen.de  
www.cjc.de

### Poland

C.C.JENSEN Polska Sp. z o.o.  
Tel.: +48 22 648 83 43  
ccjensen@ccjensen.com.pl  
www.ccjensen.pl

### United Kingdom

C.C.JENSEN Ltd.  
Tel.: +44 1 388 420 721  
filtration@ccjensen.co.uk  
www.ccjensen.co.uk

### China

C.C.JENSEN Filtration  
Equipment (Tianjin) Co. Ltd.  
Tel.: +86 10 6436 4838  
ccjensen.cn@ccjensen.cn  
www.ccjensen.cn

### Greece

C.C.JENSEN Greece Ltd.  
Tel.: +30 210 42 81 260  
ccjensen.gr@ccjensen.gr  
www.ccjensen.gr

### Spain

C.C.JENSEN Ibérica, S. L.  
Tel.: +34 93 590 63 31  
ccjensen.es@ccjensen.es  
www.cjc.dk

### USA

C.C.JENSEN Inc.  
Tel.: +1 770 692 6001  
ccjensen@ccjensen.com  
www.ccjensen.com

### Denmark

C.C.JENSEN Danmark  
Tel.: +45 7228 2222  
ccjensen.dk@ccjensen.dk  
www.cjc.dk

### India

C.C.JENSEN India  
Tel.: +91 4426241364  
ccjensen.in@ccjensen.in  
www.ccjensen.in

### Sweden

C.C.JENSEN AB  
Tel.: +46 8 755 4411  
sales@ccjensen.se  
www.ccjensen.se



Scan the QR code and find  
your nearest distributors  
at [www.cjc.dk/contact](http://www.cjc.dk/contact)

**- or give us a call!**

Your local C.C.JENSEN distributor

### ARMADOR ENERGY

VAARTKANT RECHTS 7G  
B 2960 BRECHT  
+32 35 41 25 22  
INFO@ARMADOR-ENERGY.BE  
WWW.OLIEFILTRATIE.BE

**C.C.JENSEN A/S**  
[www.cjc.dk](http://www.cjc.dk)

